




DONMAR[®] SUNROOFS & ACCESSORIES

Automotive Cameras the next level of automotive obstacle avoidance systems



Our mini backup cameras are optimized for superior image quality, day or night. A precision ground wide angle glass lens is paired with a high resolution CMOS image sensor to capture greater contrast and detail than the competition. High Tech CMOS incorporates advanced image processing functions, including auto exposure control, auto gain control, auto white balance, lens correction, defective pixel correction, and the industry's best-in-class low light sensitivity, to provide full-frame images at an extremely fast vertical refresh rate so you get a sharp, clear, fluid video image while moving. Premium CCD image quality, at a competitive CMOS price.

GT-6350/C



GT-6530 Black
GT-6530C Chrome



license plate bar mount
Available Black or Chrome
adjustable angle
Composite Housing
Wide Angle: 170 degrees
Low Light: <0.5 Lux
Hi-Rez CMOS: 480 TV lines
RCA Video Connection

GT-6207C



22mm Cube
adjustable hinged bracket
Composite Housing
Wide Angle: 170 degrees
Low Light: <0.5 Lux
Hi-Rez CMOS: 480 TV lines
1.7mm glass lens
RCA Video Connection

GT-6203C



24mm Bullet
adjustable butterfly bracket
Zinc Alloy Metal Housing
Wide Angle: 170 degrees
Low Light: <0.5 Lux
Hi-Rez CMOS: 480 TV lines
1.7mm glass lens
RCA Video Connection

GT-T6003/V



GT-T6003 horiz.
GT-T6003V vert.

22mm Wedge
stud mount, drill-in base
Composite Housing
Wide Angle: 170 degrees
Low Light: <0.5 Lux
Hi-Rez CMOS: 480 TV lines
1.7mm glass lens
3.5mm Stereo > RCA Connection

GT-6402C



22mm Cube
stud mount, drill in base
Zinc Alloy Metal Housing
Wide Angle: 170 degrees
Low Light: <0.5 Lux
Hi-Rez CMOS: 480 TV lines
1.7mm glass lens
3.5mm Stereo > RCA Connection

GT-6508C



24mm Cube
lip mount, fixed flange bracket
Composite Housing
Wide Angle: 170 degrees
Low Light: <0.5 Lux
Hi-Rez CMOS: 480 TV lines
1.7mm glass lens
RCA Video Connection

GT-6331



19mm flush mount (drill-in)
includes hole saw
Zinc Alloy Metal Housing
Wide Angle: 120 degrees
Low Light: <<0.5 Lux w/NightVision
Hi-Rez CMOS: 480 TV lines
RCA Video Connection

Ideal for Hitch View

High Resolution + High Contrast + Ultra Low Light Sensitivity = BETTER VIEW

See Reverse Side for Detailed Camera Specifications and Additional Products



RearView Cameras

the next level of automotive obstacle avoidance systems



Mini Camera Detailed Specifications

- Reverse Image (for Backup view)
- Universal Mounting Systems
- Wide Angle 1.7mm Glass Lens
- OV7960 1/3" CMOS Image Sensor
- Hi-Resolution: 480 TV lines
- Pixels: 668x576_{NTSC} / 668x512_{PAL}
- Signal/Noise Ratio: : ≥ 48dB
- Electronic Shutter: 1/60 - 1/10,000_{SEC}
- Fast Vertical Refresh Rate: 60Hz
- Minimum Illumination: < 0.5LUX
- Ultra Low-light Sensitivity of 12V/LUX-SEC
- Automatic Gain Control
- Automatic White Balance
- Auto Back Light Compensation
- Operating Temp: -22~158°F
- Operating Humidity: RH 95% Max.
- Waterproof IP66
- Shockproof
- Power DC 12v ±1v, <1w
- Body Color: Black
- RCA Composite Video output: 1.0vp-p 75Ω load
- 6M RCA Video Cable Included
- » **Optional Normal Image View** (field switchable)
- » **Parking Grid Overlay** standard
- » **Optional RF Shielded Coax Video Cable**



GT-M3003

- 3.5in 4:3 TFT LCD monitor
- Hi-Rez 320x240
- built-in sun shield
- anti-glare surface
- 2-channel RCA input
- auto-switch to backup camera
- 5 button controls
- adjustable contrast, brightness
- optional parking grid overlay
- ball socket swivel bracket
- flexible mounting base

suitable for backup camera and alternate video input




GT-7008 Intelligent Parking Assist Module


New intelligent parking assist module interfaces the camera to the OBD-II port, and reads CAN-bus data from electronic stability control system to generate an active parking trajectory pattern on-screen. Similar to OEM parking trajectory systems found on expensive European luxury cars. Works with any camera and display, only on vehicles equipped with electronic stability control.



Intelligent Parking Assist

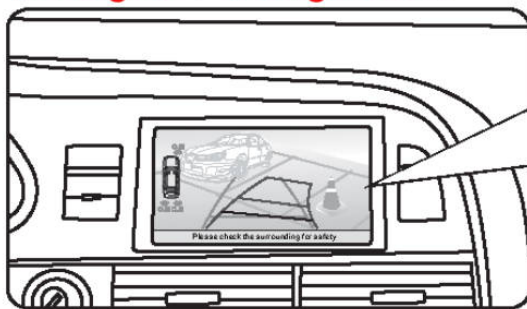

OPS Menu Bar Positioning Lines Parking Trajectory

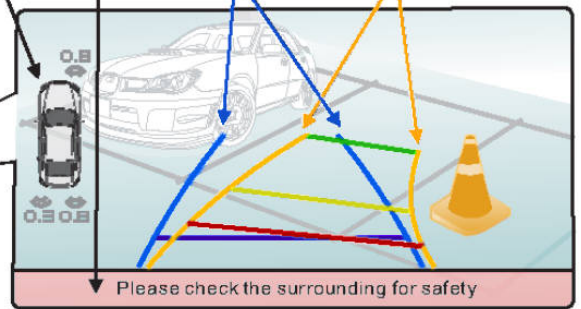

DONMAR

SUNROOFS & ACCESSORIES

<http://www.donmar.com>



3 YEAR
36,000 MILE
WARRANTY

Made in China

Your Local Restyling Professional